

PE-VE INDUSTRY

STRONG PERFORMANCE AT A COMPACT PRICE



80
1946 - 2026

BAUER
KOMPRESSOREN

FOCUSING ON THE CORE OF QUALITY

THE PE-VE SERIES – AN ALL-ROUNDER FOR THE INDUSTRY SECTOR

BAUER's new PE-VE Series presents compressors offering an attractive range of features from the Basic model upwards, all at outstanding value for money.

The systems are available for pressures up to 420 bar and as booster systems. Available with a wide range of compressor options and extensive accessories, the PE-VE Series enables tailored solutions to be designed for virtually all uses involving breathing air or nitrogen.

The systems have BAUER's high-pressure compressor blocks at their core, with their legendary market reputation for reliability and durability. The system technology is designed for industrial use.

As an all-new feature, the B-APP enables users to control and monitor their systems from a smartphone in real time.

- › 25 - 420 bar
- › 85 - 1470 l/min
- › Available as open or soundproofed models
- › For air and nitrogen
- › Compressor or booster version





ULTIMATE EASE OF OPERATION

The PE-VE Series is a classic mainstay of BAUER's product programme. Advanced and perfected over the years, its design has been proven in practice thousands of times over and is synonymous with reliability, ease of operation and easy maintenance.



BUILT FOR INDUSTRIAL USE

BAUER high-pressure compressor blocks form the core of the system. With their legendary high standards of durability and ruggedness, they provide reliability compression of air and nitrogen to the required final pressure over years of industrial use.



SUPER SILENT SOUNDPROOFED MODEL

The PE-VE Series SUPER SILENT model features a sophisticated soundproofed design that reduces noise emissions to virtually negligible levels. The compressor block is separated from the base frame by means of a special motor suspension for low-vibration operation.



REMOTE ACCESS

With the B-CONTROL MICRO and the B-CLOUD connection, you can monitor, analyse and optimise your system remotely. Harness the power of the cloud.



B-CLOUD REMOTE ACCESS



B-CLOUD provides a real-time overview of all operational data for your BAUER systems equipped with the B-CONTROL MICRO control unit. In the event of warnings or faults, the system can send a push notification to your smartphone upon request.

TARGETED TECHNOLOGY SOLUTIONS

MODULAR CONCEPT FOR TAILORED SOLUTIONS

The new PE-VE Series combines tried-and-tested technology, proven over decades, with cutting-edge new features such as the B-APP, which enables systems to be controlled and monitored from a smartphone. Offering numerous model variants and with a consistent modular structure, the Basic system can be expanded in a targeted manner to suit the precise needs of the user. The extensive range of accessories includes soundproof cladding, air and gas purification systems, filter cartridge monitoring, refrigeration dryer to extend filter cartridge life, and storage solutions.

- › Cylinders are plasma-nitrided and plateau-honed for outstanding surface hardness, ensuring extra-long service life
- › The free pistons in the compressor's high-pressure final stage have practically wear-resistant piston rings of high-tech plastic.
- › The compressor systems are equipped with energy-saving three-phase motors with IE3 energy efficiency rating as standard. Power transmission is provided by a low-maintenance self-tensioning V-belt drive.
- › **New:** The B-DRAIN automatic condensate drain system ensures that any oil/water condensate is extracted energy-efficiently at minimum loss of pressure, low noise and low wear.

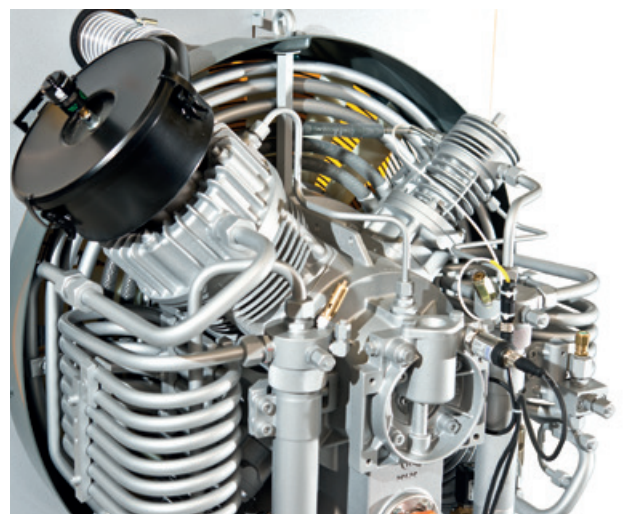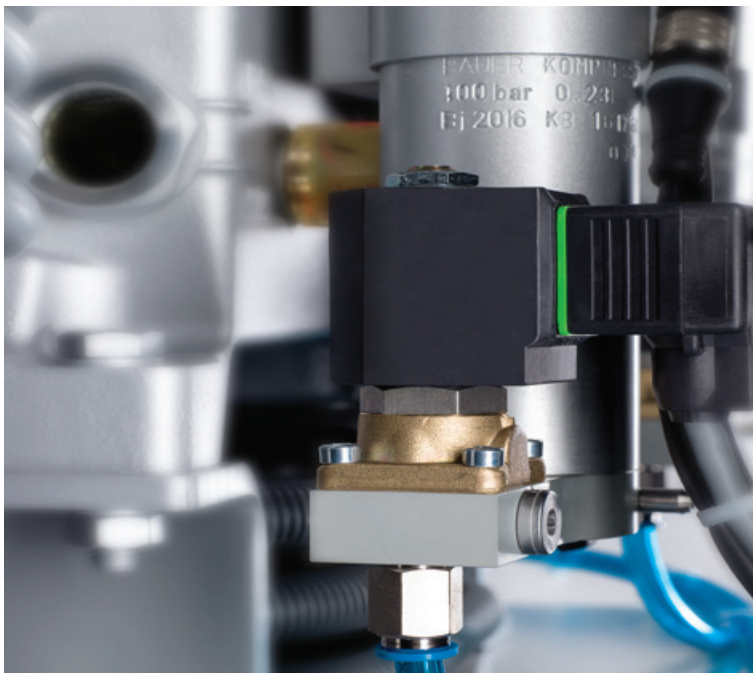

SMART SYSTEM MANAGEMENT

B-CLOUD

With the B-CLOUD, BAUER COMPRESSORS brings the Internet of Things to your operations. It ensures you always have everything under control. A quick glance at the B-CLOUD browser application or the B-APP is all it takes to access all the important information you need. Whether you want to check the status of your systems or require assistance from our service technicians in case of an issue, BAUER and the B-CLOUD are here to support you.

The B-CLOUD provides fault notifications with detailed plain-text diagnostics, so you can immediately identify the problem. It also regularly informs you about upcoming maintenance work and, if desired, connects with your BAUER-authorized service partner. Archiving all critical data and generating automatic monthly reports is made effortless with the B-CLOUD.

The B-CLOUD also offers a range of other useful features, including calculation tools, an integrated global dealer search, and access to news and videos about compressed air and BAUER COMPRESSORS.

B-APP

The B-APP delivers the full range of B-CLOUD functions to your smartphone or tablet, providing flexible remote access to your BAUER COMPRESSORS and gas measurement systems.

Available on the App Store (iOS) and on Google Play (Android).



Stay informed anytime, anywhere with B-APP



The B-CONTROL MICRO is a modern, easy-to-use compressor control unit with a colour display that intelligently controls and reliably monitors all basic functions.

Interaction between the user and the controller is user-friendly and logical. The information on the colour display is presented in plain text. A choice of languages is available. The new user-friendliness of the display and navigation sets new standards. Connection to external on/off signal transmitters is possible, as is operation in a network or the connection of an external display.

PE-VE INDUSTRY – OPTIONAL FEATURES

CUSTOMISE THE SYSTEM TO YOUR INDIVIDUAL NEEDS

- › **SUPER SILENT cladding:** Reduces the acoustic pressure level of the compressor system while permitting an exhaust air shaft to be used. Super Silent cladding can be retrofitted at a later date if required.
- › **P 41/61 Purification Systems:** Depending on the application or filter cartridge type, these systems absorb, convert or extract moisture (H₂O) and oil. They are available as integrated and external models.
- › **Particulate filter**
- › **B-SECURUS filter cartridge monitoring unit:** Efficiently monitors filter cartridge saturation.
- › **B-KOOL:** This fully integrated refrigeration dryer helps you to slash operating costs by significantly extending filter cartridge life. Purchase costs are soon recouped.
- › **Intake unit:** Delivers air or gas to the compressor at appropriate monitored intake pressure.
- › **Intake pressure reducer**
- › **60-litre condensate vessel**
- › **Base frame-mounted storage systems:** The compressor and up to two storage cylinders, each with a geometric volume of 50 or 80 litres, are mounted on an extended base frame to form a ready-to-use system.
- › **Exhaust air shaft:** For installation of SUPER SILENT systems in containers, housings or operating rooms.



TECHNICAL DATA

PE-VE 365 BAR

Model	F.A.D. ¹			Max. operating pressure ²		No. of stages	Speed approx. rpm	Motor power kW	Net weight approx.	
	l/min	m ³ /h	cfm	bar	psig				kg	lbs
PE-VE SERIES, 90 - 365 bar										
PE 100-3-VE	85	5.1	3	365	5300	3	900	3	270	595
PE 100-4-VE	125	7.5	4.4	365	5300	3	1270	4	275	610
PE 120-4-VE	170	10.2	6	365	5300	3	1200	4	275	610
PE 120-5.5-VE	215	12.9	7.6	365	5300	3	1470	5.5	290	640
PE 120-7.5-VE	260	15.6	9.2	365	5300	3	1800	7.5	305	675
PE 12.14-11-VE	350	21	12.4	365	5300	4	1800	11	325	720
PE 150-11-VE	500	30	17.7	365	5300	4	1230	11	350	770
PE 180-15-VE	620	37.2	21.9	365	5300	4	1440	15	365	805
PE 180-18.5-VE ³	800	48	28.3	350	5100	4	1800	18.5	385	850

Dimensions L x W x H
 1140 x 830 x 1520 mm
 PE 180-18.5-VE:
 1600 x 830 x 1520 mm

PE-VE 420 BAR

Model	F.A.D. ¹			Max. operating pressure ²		No. of stages	Speed approx. rpm	Motor power kW	Net weight approx.	
	l/min	m ³ /h	cfm	bar	psig				kg	lbs
PE-VE SERIES, 350 - 420 bar										
PE 100-3-VE-420 ³	85	5.1	3	420	6100	3	900	3	270	595
PE 120-5.5-VE-420 ³	190	11.4	6.7	420	6100	3	1350	5.5	290	640
PE 12.14-7.5-VE-420	300	18	10.6	420	6100	4	1450	7.5	300	660
PE 15.11-11-VE-420	420	25.2	15	420	6100	4	1320	11	350	770
PE 18.1-15-VE-420	515	30.9	18.2	420	6100	5	1490	15	380	840

Dimensions L x W x H
1140 x 830 x 1520 mm

PE-VE BOOSTER 365 BAR

Model	F.A.D. ¹			Intake pressure bar	Max. operating pressure ²		No. of stages	Speed approx. rpm	Motor power kW	Net weight approx.	
	l/min	m ³ /h	cfm		bar	psig				kg	lbs
PE-VE SERIES, 200 - 950 l/min, 90 - 365 bar											
PE 10.2-7.5-VE	290	17.4	10.2	2	365	5300	3	1350	7.5	310	685
	385	23.1	13.6	3	365	5300	3	1350	7.5	310	685
PE 12.2-5.5-VE	200	12	7.1	5	365	5300	2	1230	5.5	290	640
	295	17.7	10.4	7	365	5300	2	1230	5.5	290	640
	390	23.4	13.8	9	365	5300	2	1230	5.5	290	640
	475	28.5	16.8	11	365	5300	2	1230	5.5	290	640
PE 15.3-11-VE	510	30.6	18	7	365	5300	2	1140	11	350	770
	590	35.4	20.8	8	365	5300	2	1140	11	350	770
	670	40.2	23.7	9	365	5300	2	1140	11	350	770
	750	45	26.5	10	365	5300	2	1140	11	350	770
PE 15.3-11-VE (high flow)	660	39.6	22.3	7	365	5300	2	1440	15	360	795
	760	45.6	26.8	8	365	5300	2	1440	15	360	795
	850	51	30	9	365	5300	2	1440	15	360	795
	950	57	33.5	10	365	5300	2	1440	15	360	795
PE 15.41-15-VE	430	25.8	15.2	2	365	5300	3	1350	15	365	805
	590	35.4	20.8	3	365	5300	3	1350	15	365	805
	750	45	26.5	4	365	5300	3	1350	15	365	805
PE 15.41-15-VE (high flow)	490	29.4	17.3	2	365	5300	3	1530	15	365	805
	660	39.6	23.3	3	365	5300	3	1530	15	365	805
	830	49.8	29.3	4	365	5300	3	1530	15	365	805
PE15.52-15-VE	730	44	25.8	4	365	5300	3	1450	15	365	805
	850	51	30	5	365	5300	3	1450	15	365	805
	1170	70	41.3	7	365	5300	3	1450	15	365	805
	1300	78	45.9	8	365	5300	3	1450	15	365	805

1 Volume flow rate according to ISO 1217. Different ambient conditions will result in differing performance values.

2 Maximum allowable working pressure = max. setting safety valve; final pressure (shut-down pressure) lower.

3 Not suitable for compressing nitrogen.

Dimensions L x W x H
1140 x 830 x 1520 mm

PE-VE BOOSTER 50 BAR

Model	F.A.D. ¹			Intake pressure	Shut-down pressure max.		No. of stages	Speed approx.	Motor power	Net weight approx.	
	l/min	m ³ /h	cfm	bar	bar	psig		rpm	kW	kg	lbs
PE-VE BOOSTER 25 – 50 bar											
PE12.3-5.5-VE	610	37	21.5	5	25	360	1	1300	5.5	290	640
	550	33	19.4	5	30	435	1	1300	5.5	290	640
	465	28	16.4	5	40	580	1	1300	5.5	290	640
	1040	62	36.7	7.5	25	360	1	1300	5.5	290	640
	950	57	33.5	7.5	30	435	1	1300	5.5	290	640
	800	48	28.3	7.5	40	580	1	1300	5.5	290	640
	700	42	24.7	7.5	50	725	1	1300	5.5	290	640
	1470	88	51.9	10	25	360	1	1300	5.5	290	640
	1390	83	49.1	10	30	435	1	1300	5.5	290	640
	1210	73	42.7	10	40	580	1	1300	5.5	290	640
	1080	65	38.1	10	50	725	1	1300	5.5	290	640

¹ Volume flow rate according to ISO 1217. Different ambient conditions will result in differing performance values. Values valid for 50 Hz.

Dimensions L x W x H
1140 x 830 x 1520 mm

**INTERESTED IN OUR
PRODUCTS?**

**CONTACT US – WE ARE HAPPY TO PRO-
VIDE INFORMATION AND ASSISTANCE.**

BAUER KOMPRESSOREN GmbH
Stäblistr. 8
81477 Munich
Tel. +49 (0) 89 78049-0
Fax +49 (0) 89 78049-167
info@bauer-kompressoren.de
www.bauer-kompressoren.de



PE-VE INDUSTRY EN
N42434
04.2026

Subject to technical change without notice